




Product Features

- temperature sensor for connection to BMS
- temperature range 0 - 100 °C
- four-wire technology
- tolerance class A
- for insertion in the isolating unit of the MULTI-THERM circulation balancing valve, the measuring nozzles of the MULTI-FIX-PLUS circulation balancing valve and the measuring nozzles of the MULTI T-PIECE
- for all dimensions
- can be used for all valves with frontal drain opening in combination with drain valve with immersion sleeve (part no. J71091500000600)

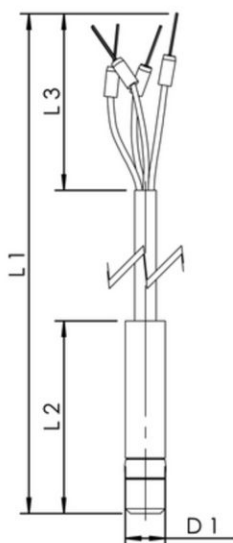

Technical data

- pressure rating PN 16
- min. operating temperature 0 °C
- max. operating temperature 100 °C
- protection class IP67

Part no.	D1 (mm)	L1 (mm)	L2 (mm)	L3 (mm)	kg
T510014000003KP 9,6		2000	45	40	0.1

FORHANDLER I NORGE
Froster AS - Sandviksveien 30, 5036 Bergen - Norge
 Tlf: +47 55 36 58 55 • post@froster.no • www.froster.no

